

Please read below content carefully before using


Thank you very much for purchasing our BT550 Bluetooth PTT headset. In this user manual, we introduce the method of using BT550 product, you can know more about our product according to this manual and practical use. We hope you would like it.

- ◆ Please read the "Cautions and Notes" before using the product for its safe and correct use.
- ◆ All of the following points contain important safety instructions and must be strictly followed.

Cautions

- ◇ DO NOT immerse in water to avoid damaging the product as well as shortening its lifetime.
 - ◇ DO NOT drop or apply shock to the product. Such act may cause irreparable damage to the product.
 - ◇ DO NOT expose the product to open flame or under the direct sunlight for a prolonged period of the time. Such environment may cause malfunction or fire.
 - ◇ Please do not change the setting or talk on the cell phone while driving. It may cause an accident. Please note: in no event our product shall be liable for any special, indirect, punitive, incidental, exemplary or consequential damages, or any damages whatsoever resulting from the usage of this product.
 - ◇ Conversation on the cell phone when driving is extremely dangerous. Please go out of the road for doing the telephone call.
 - ◇ If anything unusual such as smoke, heat or bad smell is detected, please disconnect immediately the power and stop the usage. Continuing the use may cause electric shock or fire.
 - ◇ DO NOT lick, bite or put the product into the mouth. Such act may result in serious injuries /accidents. Take utmost caution around children.
 - ◇ DO NOT change the device when it gets wet. With water exposure, it may cause fire, electrification or failure.
 - ◇ Temperature range of use: -15 C-50 C.
 - ◇ Please use only qualified accessories which have been authenticated by us, in order to guarantee the product correct functioning.
- #### Notes on battery charge
- ◇ For battery charge, use USB terminal or USB adaptor at normal temperature.
 - ◇ Use regulation USB terminal only. Otherwise it may cause smoke generation or fire.
 - ◇ When charging the battery, if any strange odor or high heat should emerge, please immediately pull the plug from the body. It may cause smoke generation or fire.
 - ◇ Do not leave the product in a state of charge long after the charging is completed. Such condition may cause smoking/ignition.
 - ◇ Charge battery at least once every six months even if the product is not use for an extended period of time. Over discharge may require battery replacement.

product description:

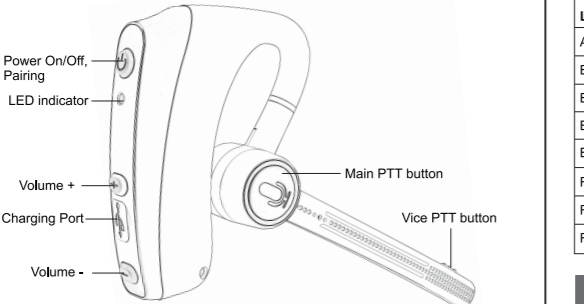

- ◆ Dual PTT function
- ◆ Double voice links
- ◆ Support Poc Intercom
- ◆ Phone calls
- ◆ 3D Music
- ◆ GPS

Specification:

Model	BT550		
Bluetooth version	V4.1 Class 2	Mic type	Dual MIC with DSP noise and echo cancellation
Bluetooth profile	HSP, HFP, A2DP, SPP		
Operation distance	10m	Mic type	Dual and echo cancellation
Charge time	About 3 hours	Operating time	-15°C ~ 45 °C
Working time	About 12 hours	Storage time	-25°C ~ 60°C
Standby time	About 100 hours	Battery	Li-polymer Battery(190mA/3.7V)

LED light Indicator:

LED Indicator type	Indicated State
All LED Indicators off	Power off
Blue lights short flashing every 2 seconds	Standby
Blue lights long flashing every 3 seconds	Connected
Blue light solid on	Call audio activated
Blue lights and Red lights flashing alternately	In pairing state
Red lights flashing twice every 60 seconds	Battery low
Red light flashing	Charging time
Red light solid on	Finish Charging

Main Features:

1. Phone Calls

- 1)Bluetooth Hands-free. Dual hands free with mixed dual audio supported.
- 2)Support voice dial.
- 3)Support the last number redial.
- 4)Call answer, reject and hang up functions supported.
- 5)Hands-free Volume Control.

2. POC Intercom

- 1) Support brand intercom software such as: Zello Azetti Eschat.
- 2) Using DSP noise reduction technology to ensure clear sound quality in noisy environments.
- 3) Independent Talkback volume control buttons.

3. Push To Talk Function

- 1) Can listen the merged audio from both connected devices or talk group at the same time.
- 2) Can listen to GPS message even during active call.
- 3) Can listen and speak to walkie-talkie radio even during active call.

- 4) High security and privacy level. Only the user can hear the conversation from both far ends. The audio from two other far ends are completely blocked, and can't listen to each other to prevent information leakage to unwanted person.

4. Dual Audio Merge Listen and Separate Talk Function

- 1) Two mobile phones.
- 2) One mobile phone and one radio phone with Bluetooth adapter/dongle device.
- 3) One cell phone and one GPS navigator with Bluetooth HFP/HSP profile.
- 4) One radio device with BT Adapter/Dongle and one GPS navigator with Bluetooth HFP/HSP profile.

5. Dual Link Connect Function

- 1) Two mobile phones.
- 2) One mobile phone and one radio (Sepura / Icom) with Bluetooth or Bluetooth adapter/dongle device.
- 3) One cell phone and one GPS navigator with Bluetooth HFP/HSP profile.
- 4) One radio device with BT Adapter/Dongle and one GPS navigator with Bluetooth HFP/HSP profile

6. Stereo Music playing

- 1) Sharing the music form the mobile phone or other music sources with A2DP.
- 2) Support music play, pause, playback and forward control with AVRCP.
- 3) Independent volume control.

7. Supports Wireless Control

- 1) Connect with Bluetooth adapter/dongle.
- 2) Dual PTT function, can control two radio phone respectively .
- 3) Primary PTT and secondary PTT switchable.
- 4) Dual PTT and mix talk when connect to two radio phone at the same time.
- 5) Mix listen and talk with two phones or two radios, or one phone and one radio.
- 6) Primary and secondary PTT button is switchable .

Operation:

Power on

In power off state, press Power on/off button and hold it for about 3 seconds, until hear a note, release the button, blue indicator will flash to indicate power on.

Power off

In power on state, press Power on/off and hold it for about 8 seconds, until hear a long "di" tone, all LED indicators will be off to indicate power off.

Battery charge

In order to recharge the battery inside the BT550 PTT headset connect the proper USB cable to the wall charger or to a PC USB port.

Pairing with mobile phone, BT adapter/dongle or GPS

- ① Place the BT550 PTT headset and the mobile phone (BT adapter/dongle or GPS) in a visible area within 1 meter range.
- ② Make sure the BT550 PTT headset is in power off state.
- ③ Press and hold Power Button for about 8 seconds. When the Blue LED and the Red LED alternately flash, release the button; the BT550 PTT headset enters in pairing state.
- ④ By following the mobile phone, BT Adapter/Dongle or GPS navigator instructions, turn on the Bluetooth function, and search the headset devices.
- ⑤ From the found devices in your mobile phone, select the device named "PRO-BT550" and try to pair it by entering, if required on mobile phone, the pin code <0000>. Once paired successful, LED indicator will change from Blue/Red alternately to Blue flashing, indicating that the BT550 PTT headset has been connected with your mobile phone.

Now it is possible to use the BT550 to answer calls or to enjoy the music from mobile phone. To pair a second cell phone, BT Adapter/Dongle or GPS device just repeat all steps above.

Super Priority Pairing

The BT550 PTT headset can handle devices by assigning them the "super priority" property for overriding all other devices. The super priority device will transmit PTT commands by SPP profile, the audio quality is much better.

Note: When pairing with Sepura radio you need to put headset in super priority mode , for setting the super priority pairing, press and hold the BT550 PTT headset power button for about 8 seconds, the Blue LED and Red LED alternately flash, release the button, and then short press PTT button, the BT550 PTT headset enters in super priority pairing mode to pair with Sepura radio.

Note Only one device can be defined as super priority device; the latest super priority paired device will replace the previous one. Only a mobile phone, BT Adapter/Dongle or a GPS navigator (i.e. the HFP/HSP links) can be assigned as super priority.

To assign the super priority property to a mobile phone or GPS navigator, follow the normal pairing procedure (steps 1 to 4) and press the Primary PTT button before to turn on Bluetooth® on the device to pair.

Operation:

- ① Place the BT550 PTT headset and the mobile phone (BT adapter/dongle or GPS) in a visible area within 1 meter range.
- ② Make sure the BT550 PTT headset is in power off state.
- ③ Press and hold Power Button for about 8 seconds, when the Blue LED and the Red LED alternately flash, release the button; the BT550 PTT headset enters in pairing state.

- ④ If you want to assign to the phone, BT Adapter/Dongle, Radio Phone or GPS the super priority property, just short press the PTT (Primary PTT button) once at this time, then the LED indicator flash pattern will be changed to red two times and blue two times quick flashing. Super priority pairing is ready.
- ⑤ By following the mobile phone or GPS navigator instructions, turn on the Bluetooth® function, and search the headset devices.
- ⑥ From the found devices in your mobile phone, select the device named "PRO-BT550" , and try to pair it by entering, if required on mobile phone, the pin code <0000>. Once paired successful, LED indicator will change from Blue/Red alternately to Blue flashing and a "di" tone indicates that the BT550 PTT headset has been connected with your mobile phone.

Stop the Pairing Procedure

To stop an initiated pairing procedure there are two possibilities:

- Wait until the pairing procedure automatically timeouts.
- Switch off the BT550 PTT headset by long pressing the Power on/off Button.
- Short press the reset port to reset and turn off the BT550 PTT headset.

Clear All Pairing Devices

In power on and without any active phone call, press and hold both PTT (Primary PTT button) and —(MINUS button) together for 6 seconds; when RED LED flash 2 times release buttons and, after all pairing devices have been cleared, the BT550 PTT headset will automatically power off.

Volume Up or Down

In any audio active state, press and hold + (PLUS button) to increase the volume of corresponding audio source; press and hold —(MINUS button) to decrease the volume of corresponding audio source. Release the button when the volume reaches the desired level. When the max or min volume level is reached, a limit tone note will be played. The volume of each audio source (two phones, two music, intercom) can be individually tuned, i.e. 5 different volume parameters can be used.

Volume Levels Automatic Save

All favorite volume levels for each audio source are saved by the BT550 PTT headset at power off, so at next power on, the BT550 PTT headset can automatically set the last user favorite volume level, without any operation required for the user.

Automatic Noise Dependent Volume Control

During phone calls, radio talk, intercom calls or GPS audio messages, if the wind noise or environment noise is very high and the current volume is not at maximum level, the BT550 PTT headset will automatically increase the volume level according to the noise level, and when the noise disappeared for a while, the volume automatically restores back to the original level.

Manually answer incoming call

When there is an incoming phone call, short press Power on/off button during only cell phone devices connected state or short press Power on/off Button during one phone device and one BT Adapter/Dongle device connected state to manual answer the call.

Automatically answer incoming call

The BT550 PTT headset has the automatically answer function: at the 3rd incoming call ring tone (about 8 seconds) and no reject operations have been done, the BT550 PTT headset will answer the phone call automatically.

Reject incoming call

Once hear the ring tone, double press Power on/off button, then the call will be rejected. In call active state, double press Power on/off button, the call will be hang up.

Place on hold a call

In call active state, a short press Power on/off Button to toggle shift the active call to hold and un-hold state.

Last number redial

While the BT550 PTT headset is connected with the mobile phone and system is idle (no intercom, music) quick double press Volume - button then the Mobile phone will dial the last out call number.

If the BT550 PTT headset is in active intercom mode, first close the intercom session by double pressing the Power on/off Button, then the last number redial function can be normally used. If the BT550 PTT headset is in music mode, first pause such mode by short pressing the Power on/off Button in cell phone connected only state, or pause/stop the music in user mobile phone first in the both cell phone and BT radio dongle connected state. If there are two mobile phones connected at same time with the BT550 PTT headset, the number of the last outgoing call is dialed on the same call the last outgoing call has been done; if no calls have yet been done, the last number with first connected mobile phone is dialed.

Music player start

In phone mode, without any active call, press PTT (Primary PTT button) to start the music player.

Music play/pause control

In music playing mode, short press once the Power on/off button to toggle the music play/pause state.

Music skip forward

In music playing mode, short press once the + (PLUS button) to skip the music forward.

If there are two mobile phones connected at same time with the BT550 PTT headset, the voice dial command is initiated on either the first connected mobile phone or the last phone of your phone. Then turn off your mobile phone, take out the battery for several seconds, restart mobile phone and pair with Bluetooth PTT headset and set the headset read as "default/trust/test/permit automatically connection/always visible/allow to be found" device, and further ensure that the phone prompt tone is not vibrating mode (because the vibrating impulse wave would interfere with Bluetooth frequency signal sometimes), then repair and connect with your mobile phone. For android system, please make sure in the Bluetooth PTT headset device option list, you have both "Phone" and "Media" options selected.

NOTE:

Please make sure your mobile phone supports Voice Dial before activate Voice Dial function. Be careful each mobile phone has a proper voice command to effectively start a new call. Read carefully your mobile phone user manual in order to use the voice call function.

Dual PTT Function

This function need to use with Bluetooth Adapter/Dongle or corresponding group talk walkie-talkie app in the smart phone such as Zello, Azetti, Bper, etc.

- 1) In only one BT Adapter/Dongle or smart phone with group talk app connected state, both PTT (Primary PTT button) and PTT2 (Secondary PTT button) will control the same PTT function of the only connected device;
- 2) In two BT Adapter/Dongle or smart phone with group talk app connected to BT550 state, like one link connected to a radio BT dongle, another connected to smart phone with group talk app, the first connected adapter/dongle will occupy the PTT (Primary PTT button), the later connected adapter/dongle will leave to use PTT2 (Secondary PTT button).
- 3) In two devices with PTT functions connected to BT550 state, double press the Power on/off Button can toggle shift the PTT (Primary PTT button) and PTT2 (Secondary PTT button) control;

Stereo Music Playing

The STEREO play back function only available when not connected to BT radio Adapter/Dongle state.

Music player start

In phone mode, without any active call, press PTT (Primary PTT button) to start the music player.

Music play/pause control

In music playing mode, short press once the Power on/off button to toggle the music play/pause state.

Music skip forward

In music playing mode, short press once the + (PLUS button) to skip the music forward.

Music skip backward

In music playing mode, short press once the - (MINUS button) to skip the music backward. Some mobile phone at first short press just restore back to the start of the song, another following short press on the - (MINUS button) within 3 seconds skip backward to previous song.

Remote control Support

- 1) Pairing the remote controller and BT550 as per both items user manual instructions.
- 2) After pairing successfully, you can press the remote controller to control BT550 intercom and calls handling function.
- 3) Center button mainly used as PTT button, and only the PTT function of PTT (Primary PTT button) can be remote controlled.
- 4) Short press the center button to answer phone call, double press the center button to reject or hang up phone calls.

FAQ:

- 1, Can not power on
It might low battery, please try again after charging for 3 hours, then reset the PTT headset and try again.
- 2, No sound
Please check if the headset have connected to the device or the volume too low?
- 3, Headset have feedback sound during direct intercom
The headset volume tuned too much high, or the distance between two intercom user is too much close.
- 4, Disconnect with mobile phone, Bt Adapter/dongle, or GPS
Make sure if it is low battery, if not, the distance between the headset and mobile phone within 10m? Or between them exist obstacles that absorb frequency signals like metals or water?
- 5, Can not pair with mobile phone
Clear all the pairing information according to user manual, and then put the PTT headset and mobile phone together within 1m and try to pair after entering password "0000".
- 6, Fail to connect with mobile phone
Please make sure the mobile phone support Bluetooth function and Bluetooth HFP related protocols.

8, System halts

The system halts when strong radio frequency interference occurs. Like when nearby high power TV transmitting tower, GSM base or airport radar, the PTT headset may die. It can be restored short press the reset port by a tooth stick or small pin.

9, Abnormal instruction of Charging indicator

When the PTT headset haven't been used for long time or overused, it need to be pre-charge for an hour, then pull out and in the charger, it will indicate normal charging. Please don't count the pre-charging time into normal charging time.

10, Whether or not Support using while charging

Use while charging is not recommended;

11, Compatibility with other chargers

Cigarette charger of the car or motorcycle, emergency battery pack or other type charger might be used for charging as long as their actual output voltage is between 5V to 6V and have the same plug style and power source positive and negative polarities with our initial charger. However the user will be responsible for the risk of using other chargers and we don't guarantee the effects and responsible for the risk.

12, Wrong operation into factory test or USB upgrade mode

The BT PTT headsets light indicator flashes abnormally and can't power on after wrong operation into factory test or USB upgrade mode. User must short push the reset port to reset the device.

13, Please send back your BT PTT headset to our after-sales service department for help if above 1 to 12 suggestions fail to solve your problem.

BT550 Bluetooth Headset Manual

Vänligen läs igenom innehållet noga innan du använder ditt headset

- ◆ Tack för att du köpte BT550 Bluetooth headset, hoppas du kommer att få nytta av det.
- ◆ Läs "Säkerhetsanvisningarna" innan du använder produkten för din säkerhet och rätt användning.


Varning

- ◇ Exponera inte i vatten för att undvika att skada produkten och förkorta dess livslängd.
- ◇ Tappa inte eller applicera chock på produkten. Sådan handling kan orsaka skada på produkten.
- ◇ Utsätt inte produkten för öppen eld eller under direkt solljus under en längre tid. Sådan miljö kan orsaka funktionsfel eller brand.
- ◇ Vänligen ändra inte inställningen eller prata i mobiltelefonen när du kör. Det kan orsaka en olycka. Observera: Vår produkt ansvarar inte för några speciella, indirekta, straffbara, oavsiktliga, exemplifierande eller följdskador eller skador som orsakas av användningen av denna produkt.
- ◇ Samtal på mobilen när du kör är extremt farliga. Vänligen gå ut ur vägen för att ringa.
- ◇ If anything unusual such as smoke, heat or bad smell is detected, please disconnect immediately the power and stop the usage. Continuing the use may cause electric shock or fire.
- ◇ Om något ovanligt som rök, värme eller dålig lukt upptäcks, koppla omedelbart bort strömmen och stoppa användningen. Fortsatt användning kan orsaka elektrisk stöt eller brand.
- ◇ Slicka inte, bit eller sätt produkten i munnen. Sådan handling kan leda till allvariga skador / olyckor. Var försiktig kring barn.
- ◇ Temperaturområde för användning: -15 °C -50 °C
- ◇ Använd endast kvalificerade tillbehör som har verifierats av oss, för att garantera att produkten fungerar korrekt.

OBS !! Batteriladdning

- ◇ För batteriladdning, använd USB-anslutning eller USB-adapter vid normal temperatur.
- ◇ Använd endast reglerad USB-terminal. Annars kan det orsaka rökutveckling eller brand.
- ◇ När du laddar batteriet, om någon märklig lukt eller hög värme bör brytas ut, dra omedelbart av kontakten från kroppen. Det kan orsaka rökutveckling eller brand.
- ◇ Lämna inte produkten i laddningstillstånd efter laddningen är klar. Sådant tillstånd kan orsaka skada.
- ◇ Ladda batteriet minst en gång var sjätte månad, även om produkten inte används under en längre tid. Överladdning kan kräva att batteriet byts ut.

product description:

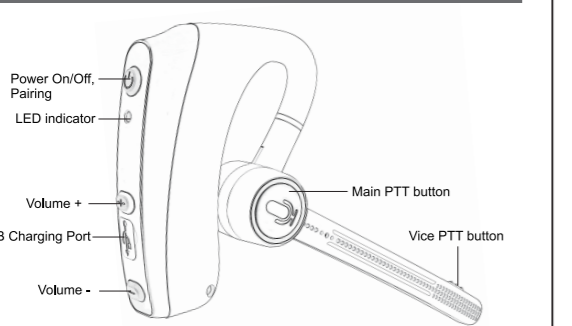

- ◆ Dual PTT function
- ◆ Double voice links
- ◆ Support Poc Intercom
- ◆ Phone calls
- ◆ 3D Music
- ◆ GPS

Specifikation

Modell	BT550		
Bluetooth version	V4.1 Klass 2	Mikrofontyp	Dual mikrofon med DSP buller och eko dämpning
Bluetooth profiler	HSP, HFP, A2DP, AVRCP, SPP	Mikrofontyp	Dual och med ekodämpning
Räckvidd	10m	Arbetstemperatur	-15°C ~ 45 °C
Laddningstid	Ca 3 timmar	Förvaringstemperatur	-25°C ~ 60°C
Taltid	Ca 12 timmar	Batteri	Li-polymer Batteri (190mA/3.7V)
Standby time	Ca 100 timmar		

Om Led-indikator och laddning

LED indikator blinkande läge	Indikeringsstatus
Alla LED Indikatorer är av	Enheten avstängd
LED indikator kort blå blinkning varje 3s	Standby
LED indikator lång blå blinkning varje 3s	Anslutet
LED indikator blinkar rött/blått växelsvis och snabbt	Parningsläge
LED indikator blinkar 2ggr varje 60 sekund	Låg batterinivå
LED indikator blinkar rött varje 1s	Enheten laddas
LED indikator lyser rött	Laddning färdigt

Handhavande

1. Telefonsamtal

- 1) Bluetooth Handsfree. Stöder Dual handsfree med mixad dual audio.
- 2) Supporterar återuppringning av senaste numret
- 3) Svare på, avvisa samt avsluta samtal stöds
- 4) Kan hantera Dual Link för mobiltelefoner
- 5) Volymkontroll

2. POC Applikation (PoC betyder PTT över Mobiltelefon)

- 1) Stöder olika POC mjukvaror så som: Zello Azetti Eschat eller Kodiak
- 2) Använder DSP brusreducering teknik för att skapa ett klart ljud även i bullriga miljöer
- 3) OBS: vissa POC applikationer kan kräva en speciell firmware uppdatering

3. PTT Funktion för radio

- 1) Anslutning till en Bluetooth radio eller en Bluetooth adapter
- 2) Dual PTT funktion kan hantera 2 st enheter samtidigt
- 3) Primär PTT och sekundär PTT är switchbara

- 4) Dual PTT och mixa talet när 2 st enheter är anslutna samtidigt
- 5) Hög sekretess på samtalen. Endast användaren kan höra båda samtalen, ljudet är helt blockerat mellan de båda samtalen.

4. Lyssna på 2 länkar och hantera din sändning separat

- 1) Du kan lyssna på 2 ljudkällor samtidigt, de mixas i ditt headset
- 2) Du kan lyssna och sända på din radio även under ett aktivt telefonsamtal
- 3) Hög säkerhets- och sekretessnivå. Endast användaren kan höra konversationen från båda ändarna, ljudet från de två andra ändrar är helt blockerade och kan inte lyssna på varandra för att förhindra informationsläckage till oönskade personer

5. Dual Länk Funktion

- 1) Två mobiltelefoner
- 2) En mobiltelefon och en radio
- 3) En mobiltelefon och en GPS navigator med Bluetooth HFP/HSP profil
- 4) En radio och en GPS navigator med Bluetooth HFP/HSP profil

6. Musik spelare

- 1) Lyssna på musik från en telefon eller annan musikälla via A2DP.
- 2) Stöder musikfunktioner som spela, pausa, framåt och bakåt via AVRCP
- 3) Oberoende volymkontroll

7. Stöder trådlös PTT

- 1) En trådlös PTT kan anslutas
- 2) Trådlös PTT enheten har stöd för uppdatering av mjukvaran

Handhavande

Starta

- När headsetet är avstängt trycker du på strömbrytaren på / av och håller den intryckt i ca 3 sekunder tills en "di" -ton hörs, släpp knappen, den blå indikatorn blinkar långsamt för att sätta på ditt headset.

Stänga av

- När headsetet är på trycker du på Power på / av -knappen och håller den intryckt i ca 8 sekunder tills en lång "di" -ton hörs, den röda indikatorn blinkar snabbt för att indikera strömavstängning.

Laddning av batteriet

För att ladda batteriet inuti BT550 PTT-headsetet, anslut rätt USB-kabel till vägggladdaren eller till en PC-USB-port.

Para med en mobiltelefon, Bluetooth radio eller GPS navigator

- 1) Placera BT550 Bluetooth-headsetet och mobiltelefonen i ett synligt område inom 1 meter.
- 2) Kontrollera att Bluetooth-headsetet är avstängt.
- 3) Tryck på / av knappen mot strömikonen i ca 8 sekunder, när den blå och röda lysdioden blinkar växelsvis, släpp knappen och BT550 Bluetooth-headsetet är nu i kopplingsläge.
- 4) Följ bruksanvisningen till din mobiltelefon, sätt på Bluetooth-funktionen och leta efter Bluetooth headset enheten
- 5) Välj den enheten som heter "PRO-BT550" från de hittade enheterna i din mobiltelefon, och försök sedan para det, när du uppmanas att ange lösenord anger du PIN-kod <0000>. När det väl har blivit parat ändras LED-indikatorn från Blå / Röd växelsvis till Blå blinkande och med en "di" -ton som noterar att Bluetooth-headsetet har anslutit till din mobiltelefon. Nu kan du använda headsetet för att trycka på eller svara på ditt telefonsamtal.

Super Prioritets Parning

BT550 PTT-headsetet kan hantera enheter genom att tilldela dem "super prioritet" -egenskapen för att överstyra alla andra enheter. Superprioritetsanordningen kommer att sända PTT-kommandon med SPP-profil.

OBS!!!! När du kopplar ihop dig med en Sepuradio skall superprioritet användas. Detta ställs in genom att trycka och hålla in strömbrytaren i ca 8 sekunder, när den blå och röda lysdioden blinkar växelsvis släpp knappen och tryck sedan kort på PTT-knappen, då går headsetet i superprioritetsläge för att kunna para ihop med en Sepuradio.

NOTERA Endast en enhet kan definieras som superprioritetsenhet; den senaste superprioritetsparade enheten kommer att ersätta den föregående. Endast en mobiltelefon, Bluetooth radio eller en GPS-navigator (dvs HFP / HSP-änkarna) kan tilldelas som superprioritet.

För att tilldela superprioritetsegenskapen till en mobiltelefon eller adapter / dongle, följ det vanliga parningsförfarandet (steg 1 till 4) och tryck på Primär PTT-knappen innan du slår på Bluetooth® på enheten för att para.

- 1) Placera BT550 Bluetooth-headsetet och mobiltelefonen i ett synligt område inom 1meter.
- 2) Kontrollera att Bluetooth-headsetet är avstängt.
- 3) Tryck på / av knappen mot strömikonen i ca 8 sekunder, när den blå och röda lysdioden blinkar växelsvis, släpp knappen och BT550 Bluetooth-headsetet är nu i kopplingsläge.
- 4) Om du vill tilldela superprioritet till en enhet skall du i parningsläget trycka en kort gång på headsetet PTT knapp (Primära PTT knappen). Headsetet kommer då blinka två gånger med den röda lysdioden och sedan två gånger med den blå lysdioden efter detta två korta blinkningar med den blå lysdioden. Superprioritets parningsläge är nu aktiverad.

- 5) Följ bruksanvisningen till din mobiltelefon, sätt på Bluetooth-funktionen och leta efter Bluetooth-headset enheten

- 6) Välj den enheten som heter "BT550 ProEquip" eller "BT550" från de hittade enheterna i din mobiltelefon, och försök sedan para det, när du uppmanas att ange lösenord anger du PIN-kod <0000>. När det väl har blivit parat ändras LED-indikatorn från Blå / Röd växelsvis till Blå blinkande och med en "di" -ton som noterar att Bluetooth-headsetet har anslutit till din mobiltelefon. Nu kan du använda headsetet för att trycka på eller svara på ditt telefonsamtal.

Avbryt Parningen

- För att avbryta parningen finns två möjligheter:
- Väntra tills parningsprocessen automatiskt avslutas
 - Stäng av BT550 enheten med ett långt tryck på Power av/på knappen.
 - USB laddning kommer också att nollställa ditt headset

Notera:

Om anslutningen med en tidigare kopplad enhet inte kopplar upp kan detta bero på flera orsaker, inklusive ett avbrott av Bluetooth-funktionen på enheten som ska anslutas. För att lösa problemet är det flera åtgärder som kan tillämpas:

- Starta om BT550 headsetet
- Starta om den Bluetooth enheten som är ansluten
- Repetera parnings proceduren
- Rensa listan på de tidigare parade headset som finns på Bluetooth enheten och upprepa parnings proceduren

Rensa minnet av parade enheter

I påslaget läge och utan att något pågående samtal är aktivt kan du rensa minnet med att hålla inne PTT knappen (Primär PTT-knapp) och - (MINUS-knappen) i 6 sekunder, när röd lysdiod blinkar 2 gånger släpper du knapparna, därefter skall alla parade enheter har raderats och BT550 headsetet kommer automatiskt att slå av sig.

Volym Upp eller Ner

I något ljud aktivt tillstånd kan ljudvolymen justeras, tryck volymkontrollknappen "+" -ikonen och håll den fast, volymen blir högre och högre. När maximal volym uppnåtts kommer en minnes ton att spelas upp. Tryck volymkontrollknappen "-" Ikonen och håll den nere, volymen kommer att sänkas, när minsta volymen nått en minneston kommer att spelas upp. Volymen på varje enhet (två telefoner, två musikspelare eller radio) kan justeras individuellt, ljudet kan justeras i 5 olika steg.

Volym lagras automatiskt

Din inställda ljudvolym för varje Bluetooth enhet sparas i BT550 när du stänger av headsetet. Detta gör att nästa gång du ansluter har du samma inställning utan att du behöva justera nivån.

Automatisk ljudavhängande volymkontroll

Vid telefonsamtal, radiosamtal eller GPS-ljudmeddelanden, om vindbruset eller omgivningsbullret är mycket högt och den aktuella volymen inte är på högsta nivå, höjer headsetet BT550 PTT automatiskt volymen beroende på omgivningsljudet, och när bruset försvinner återställs volymen automatiskt tillbaka till originalnivå.

NOTERA Denna funktion kan användas mot en Bluetooth radio (Icom / Sepura) / Bluetooth adapter eller en PoC application i en mobiltelefon som tex. Zello, Azetti, Bper,etc.

- 1) När endast en radio / adapter eller PoC applikation är ansluten till BT550 headsetet kommer PTT (Primär PTT knapp) och PTT2 (Sekundär PTT knapp) ha samma funktionalitet.
- 2) Om du har två enheter anslutna till ditt headset kommer den först parade enheten styras av PTT (Primär PTT knapp) och den andra enheten av PTT2 (Sekundär PTT knapp).
- 3) När två enheter är anslutna till BT550 kan du skifta vilken som använder den primära PTT knappen med ett dubbeltryck på Power på / av-knappen.

Avvisa inkommande samtal

När du hör ringtonen, dubbelklicka du på Power på / av-knappen, så kommer samtalet att avvisas.

Avsluta ett samtal

Om du vill avsluta ett aktivt samtal så dubbelklicka på Power på / av-knappen, samtalet kommer att hängas upp.

Parkering av ett aktivt samtal

Under ett aktivt samtal kan du parkera samtalet med ett kort tryck på Power på / av-knappen och sedan återuppta samtalet med Power på / av-knappen.

Återuppringning av senast slagna nummer

När BT550 headsetet är anslutet till en mobiltelefon och inget samtal pågår kan man med ett dubbeltryck på volymknappen "-" för att mobiltelefonen skall ringa upp det senast slagna numret. Om BT550 headsetet är i musikläge skall du pausa det här läget först genom att trycka kort på strömbrytaren på / av. Om det finns två mobiltelefoner anslutna samtidigt till BT550 kommer senast slagna samtalet gå ut på den telefonen som det sista utgående samtalet har gjorts på. Om inga samtal ännu har gjorts kommer den ringa på den första anslutna mobiltelefonen.

Röstuppringning

Medan BT550 är ansluten till mobiltelefonen, snabbt dubbeltryck på volym "+" knappen, så kommer mobilen att uppmana dig att uttrycka ditt önskade namn. (Obs: Stöguppringning behöver Mobiltelefonstöd motsvarar funktionen HFP Voice Dial.) Om BT550 headsetet är i musikläge skall du pausa det här läget först genom att trycka kort på strömbrytaren på / av. Om röstuppringning aktiveras av misstag kan man genom dubbeltryck på Volym "-" avbryta funktionen. Om det finns två mobiltelefoner anslutna samtidigt till BT550 kommer röstuppringningen gå ut på den telefonen som det sista utgående samtalet har gjorts på. Om inga samtal ännu har gjorts kommer den aktiveras på den första anslutna mobiltelefonen.

NOTERA

Se till att din mobiltelefon stöder röstuppringning innan du aktiverar funktionen. Varje mobil kan ha ett eget röstkommando för att starta ett nytt samtal. Läs noggrant din användarmanual för mobiltelefonen för att kunna använda röstsamtalfunktionen.

Dual PTT Funktion

Denna funktion kan användas mot en Bluetooth radio (Icom / Sepura) / Bluetooth adapter eller en PoC application i en mobiltelefon som tex. Zello, Azetti, Bper,etc.

- 1) När endast en radio / adapter eller PoC applikation är ansluten till BT550 headsetet kommer PTT (Primär PTT knapp) och PTT2 (Sekundär PTT knapp) ha samma funktionalitet.
- 2) Om du har två enheter anslutna till ditt headset kommer den först parade enheten styras av PTT (Primär PTT knapp) och den andra enheten av PTT2 (Sekundär PTT knapp).
- 3) När två enheter är anslutna till BT550 kan du skifta vilken som använder den primära PTT knappen med ett dubbeltryck på Power på / av-knappen.

Musikspelare

MP3 playbackfunktion är endast tillgänglig när BT550 headsetet inte är ansluten till en Bluetooth radio eller adapter.

Starta musikspelaren

I normalt telefonläge kan du med ett kort tryck på power på / av-knappen starta musikspelaren.

Musikspelare /pausa kontroll

När du spelar din musikspelare kan du pausa den med ett kort tryck på Power på / av-knappen.

Musikspelare / framåt i spellista

När du spelar din musikspelare kan du hoppa framåt i spellistan med ett kort tryck på Volym "+" knappen.

Musikspelare / bakåt i spellista

När du spelar din musikspelare kan du hoppa bakåt i spellistan med ett kort tryck på Volym "-" knappen. Vissa mobiltelefoner hoppar tillbaka till starten av en låt direkt vid ett kort tryck på Volym "-" knappen och andra efter 3 sekunder.

Trådlös PTT

- 1) Para en trådlös PTT enligt de instruktioner som finns i manualen för båda enheterna.
- 2) Efter en lyckad parning kan du använda den trådlösa PTT enheten.
- 3) Om du har en Bluetooth radio (Icom/Sepura) / adapter eller PoC applikation så kommer PTT knappen fungera som ett alternativ till din PTT (Primära PTT knappen).
- 4) Om du har en mobiltelefon ansluten och vill använda PTT enheten så är det ett kort tryck på knappen som svarar ditt samtal och ett dubbeltryck på knappen som avvisar eller avslutar ett telefonsamtal.

FAQ:

1. Startar ej

Det kan vara lågt laddat batteri, försök igen efter laddning i 3 timmar och sätt sedan på den igen.

2. Inget ljud

Kontrollera om högtalarknappen är ansluten till enheten eller volymen är för låg?

3. Kopplar från mobiltelefon, Bluetooth radio eller GPS

Kontrollera om det är lågt batteri, om inte, avståndet mellan headsetet och mobiltelefonen inom 10m? Eller mellan dem finns hinder som absorberar frekvenssignaler som metaller eller vatten?

4. Misslyckas att ansluta till eller automatiskt ansluta till mobiltelefonen igen

Kontrollera först att din Bluetooth-funktion i din mobiltelefon är påslagen och ta sedan bort alla Bluetooth-enheter i din mobiltelefon. Stäng sedan av din mobiltelefon, starta om mobiltelefonen och koppla in Bluetooth-högtalar-mikrofon och ställ in headsetet som "standard / låt / test / tillåta automatisk anslutning / alltid synlig / låta bli hittad" -enhet och se till att telefonen snabb ton är inte vibrerande läge (eftersom den vibrerande impulsvägen kan störa Bluetooth-frekvenssignalen ibland), reparera sedan och anslut med din mobiltelefon. För Android-system, se till att du har valt alternativet "Telefon" i listan över Bluetooth-enheter.

5. Onormal indikering av laddningsindikator

- 1) När headsetet inte har använts under lång tid eller överanvänds, måste den vara föraddad i en timme, sedan dra ut och i laddaren kommer den att indikera normal laddning. Ta inte med förladdningstiden som normal laddningstid.
- 2) Försök med en annan laddningskabel eller laddare.

6. Brus i ljudlänken

Flytta BT550-headsetet närmare (mindre än 10 meter) till din mobiltelefon eller radio.

7. Vänligen skicka tillbaka din BT550 headset till vår serviceavdelning för hjälp om du vill ha hjälp om ovanstående förslag inte löser ditt problem.